


## K90D-C6PC

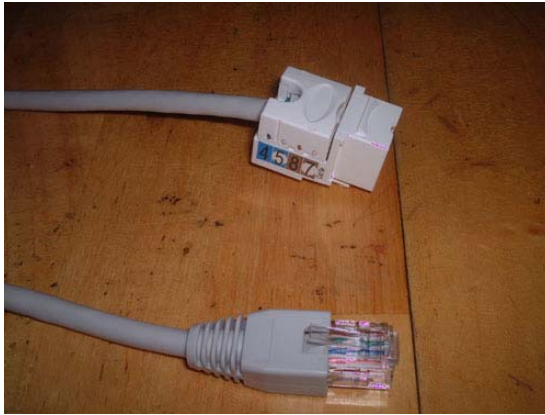

### Features:

- Category 6
- Aesthetic design
- Pre-terminated keystone jack for easier installation

### Description:

UTP cable with keystone jack connected to one side and plug on the other. Every single piece is fully factory terminated and tested for extraordinary reliability. This special solution can save much of labor work at installation.

### Specification:

STANDARDS	
Jack Cavity	FCC Part 68 Subpart F
Transmission	ANSI/EIA/TIA 568B.2-1, ISO/IEC 11801 Class E
Wiring	T568A or T568B

MECHANICAL	
Durability	Jack can endure 750 cycles min. of mating cycles

ELECTRICAL	
NEXT	< -43dB @ 100 MHz
FEXT	< -35.1dB @ 100 MHz
Insertion Loss	< 0.4dB @ 100 MHz
Return Loss	< -20dB @ 100 MHz

PHYSICAL	
MATERIAL	UL 94V-0 Flame Retardant



VOKONN TECHNOLOGY LTD.  
4F., NO.20, Alley 16 Lane 298,  
Hsin-Ming Rd., Nei-Hu, Taipei,  
114, Taiwan, R.O.C.

Tel:+886-2-2796-8123  
Fax:+886-2-2793-7996  
E-mail: info@vokonn.com

[www.vokonn.com](http://www.vokonn.com)

## Ordering Information:

# ***K90D-C5EPC - X – XX***

1 2

### 1. Cable Flame Rating

X	Rating
M	CM
P	CMR
R	CMP

### 2. Cable Length

Standard Length (m)
1
3
5
10
30