


VC-10FM

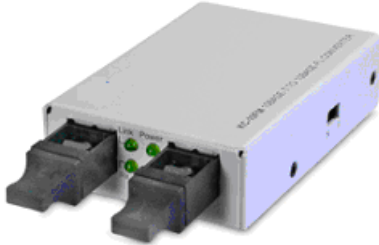

Features:

- Extend network span from 2km (multimode fiber) up to 12km (single mode fiber)
- Push button to set crossover function for TP port
- Supports ST and SC connectors

Description:

10Base-T to 10Base-FL Media Converter.

Specification:

STANDARDS	
IEEE	802.3(10Base-T and 10Base-FL)
Approval	FCC class B, CISPR 22 class B

TRANSMISSION	
TP Port	Shielded RJ-45 jack
FX Port	MM: SC, ST SM: ST
Cable	Cat. 3, 4, 5 or higher UTP cable MM: 62.5/125 μ m, 50/125 μ m SM: 9/125 μ m
LED Indication	Power status TPPort: Link/Act FL Port: Link/Act

PHYSICAL	
Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 70% non-condensing
Operating Voltage	12 VDC, 500 mA
Dimension	L74 x W51 x H20 (mm)



VOKONN TECHNOLOGY LTD.
4F., NO.20, Alley 16 Lane 298,
Hsin-Ming Rd., Nei-Hu, Taipei,
114, Taiwan, R.O.C.

Tel: +886-2-2796-8123
Fax: +886-2-2793-7996
E-mail: info@vokonn.com

www.vokonn.com

Ordering Information:

VC-10FM - X

X	Connector	Mode	Distance	Wavelength	Tx Power	Sensitivity	Rx Max.
T	ST	MM	2 km	850 nm	-19 ~ -14 dBm	-31 dBm	-14 dBm
C	SC	MM	2 km	850 nm	-19 ~ -14 dBm	-31 dBm	-14 dBm
S12	ST	SM	12 km	1300 nm	-20 ~ -14 dBm	-31 dBm	0 dBm